SC series

Warning Light & Electric Horn Combinations

IP44 | -20→+50℃ | HORN | 108dB | 115dB

SC series can combine all of our warning light and electric horn products into a single combination model depending on your specific needs

SC1

The budget model of small-sized warning light and electric horn combinations
• Protection rating : IP44
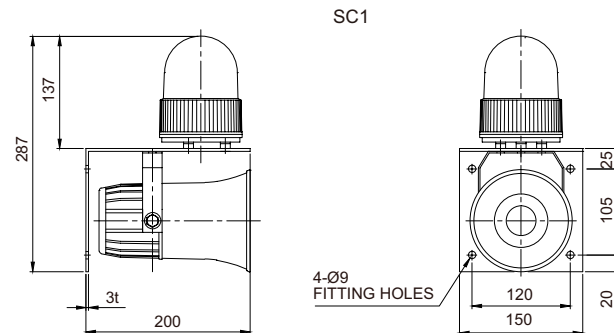
Specification for Standard Model

• Standard combination includes S100R products combination with SRN (same as pictured to the left)

Technical Diagram (Units : mm)

SC1

137
287
3t
200
25
105
120
150
20
4-Ø9
FITTING HOLES

SC1

Customization

• Warning light : Select one from S100 series(Please refer to page 63-69) for the combination
• Electric horn : Select one from SN, SRN, SEN15/ 25(Please refer to page 383-384) for the combination

SC2

Most commonly used standard-sized warning light and electric horn combination model
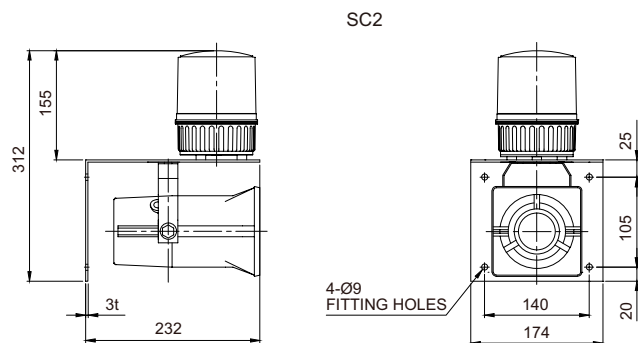• Protection rating : IP44

Specification for Standard Model

• Standard combination includes S125U products combined with the SEN15 (Same as pictured to the left)

Technical Diagram (Units : mm)

SC2

155
312
3t
232
25
105
140
174
20
4-Ø9
FITTING HOLES

SC2

Customization

• Warning light : Select one from S125 series(Please refer to page 70-76) for the combination
• Electric horn : Select one from SN, SRN, SEN15/25(Please refer to page 383-384) for the combination

Warning/
Signal/
Stackable

Signal &
Electric Horn/
Speakers

Vessels and
Heavy-Duty
Equipment

Explosion
Proof

Warning
Light Bar

Aviation
Obstruction
Lights

Signal Tower
Lights

USB/ETN
Signal Tower
Lights

Electric Horn/
Speakers

Industrial
LED Lights

Warning Light & Electric Horn Combinations

Qlight

| IP56 | -20→50℃ | HORN | 118dB | 120dB |

SC3

Waterproof, dustproof type warning light and electric horn combinations
• Protection rating : IP56

Common Specifications

• Combination of SH1-2T and signal horn SEWN30L(Same as pictured to the left)
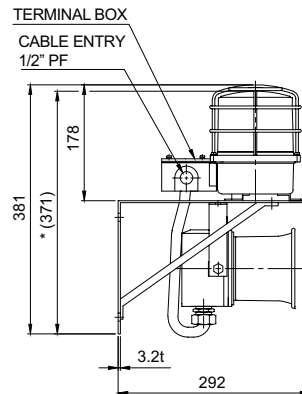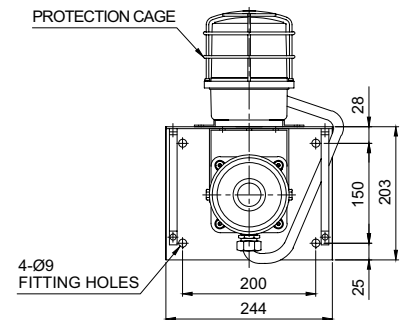
Technical Diagram
(Units : mm)

SC3

TERMINAL BOX
CABLE ENTRY 1/2" PF

178
381
*(371)
3.2t
292

PROTECTION CAGE

28
150
203
25
4-Ø9 FITTING HOLES
200
244

※ *(371) represents SC3 size without protection cage.

Customization

• Warning light : Select between models SH1P-2T and SH2P-2T series
 (Please refer to page 153-159)
• Electric horn : Choose one model among SEWN30L/50L, SEHN25 and SEHN50
 (Please refer to page 179-174)
• Stainless steel bracket

Standard Model Number

SC1	-	220	-	R
[Model number]		[Voltage]		[Color]

• SC1 (S100R+SRN)
• SC2 (S125U+SEN15)
• SC3 (SH1P-2T+SEWN30L)

• 12-DC12V
• 24-DC24V
• 110-AC110V
• 220-AC220V

● R-Red
● A-Amber
● G-Green
● B-Blue

Ordering Specification

SC3	- (	SH1P-2T	-	R	+	SEWN30L	-	WS	) -	220
[Model number]		[Light type]		[Color]		[Horn type]		[Sound]		[Voltage]

• SC1   • Select 1 model among S100 series

• SC2   • Select 1 model among S125 series

• SC3   • Select 1 model among SH1P-2T and SH2P-2T series

● R-Red
● A-Amber
● G-Green
● B-Blue

• Select 1 model among SN, SRN and SEN15/25

• Select 1 model among SRN and SEN15/25

• Select 1 model among SEWN30L/ 50L and SEHN25/50

• WS -Warning sounds
• WP -Special warning sounds
• WM -Melodies
• WA -Alarms
• WV -Customizable voices

• 12-DC12V
• 24-DC24V
• 110-AC110V
• 220-AC220V

※ Light sources can be selected among LED revolving, LED steady/flashing, xenon strobe and bulb revolving type.